



DoorBird Video Door Station D201B, Full Stainless-Steel, with Bronze finish, Surface Edition



The high-quality bronze look is created in a cost-intensive process and shows individual and beautiful bronze gradients.





Technical data

| General | | Video | |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Housing | Front panel 3,0mm brushed Stainless steel, Stainless steel surface-mounted housing, galvanized steel sheet | Camera | HDTV 720p, dynamic (VGA – HDTV) |
| Doorbell button | Stainless-steel button with illuminated LED Ring | Lens | High-end Ultra wide-angle Hemispheric Lens 180° horizontal, 90° vertical, straightened, IR-capable |
| Nameplate | Illuminated | Night-vision | Yes, Light sensor, Automatic IR-Cut Filter |
| Mounting type | Surface-mounted | Audio | |
| Power supply | 15VDC (power 110-240VAC) or Power over Ethernet (PoE 802.3af Mode-A) | Audio components | Speaker and microphone, Echo and Noise Canceller |
| Weight | 1.25 KG | Audio streaming | Two-way |
| Connectors | Power, Electric door opener / strike, Door chime, Door opener button, Network | Network | |
| Outdoor-ready | Yes, IP54 | WiFi | 802.11b/g/n 2.4GHz |
| Approvals | CE, IC, FCC, IP54 | Ethernet | Connector |
| Dimensions | 215 x125 x 58mm (H x W x D) | Motion sensor | |
| Operating conditions | - 20 to +40°C Humidity 10 to 85% RH (non condensing) | Type | Passive Infrared sensor (PIR) |
| Included accessories | Video Door Station, front panel, surface-mounted housing, Power supply unit (world-wide, 110-240V), , DIN-Rail power supply sold separately, Screw package, Quickstart Guide , 2x 1m antenna extension cable, 2x external antenna | Detection angle | 180° |
| EAN | 4260423860216 | Range | 2-8m (dep. on environm.) |
| Current system requirements | | Illumination | |
| Mobile device | Latest iOS on iPhone /iPad, latest Android on Smartphone or Tablet | Lighting ring | 12 intelligent Infrared LEDs |
| Internet | High-Speed landline broadband Internet connection, DSL, cabel or Fiber, min. 500kbs Uploadbandwidth, no Socks- or Proxyserver | Range | 2-8m (dep. on environm.) |
| Network | 802.11b/g/n 2.4GHz or Ethernet network, with DHCP | Integrated wireless modules | |
| Recommended installation height | Camera lens should be at a min. height of 125cm | WiFi | 2,4 GHz, external antenna |
| | | RFID | 433 MHz, external antenna |
| | | Bluetooth | Available separately |
| | | Optional accessories | |
| | | Sold separately | DIN-Rail Power supply A002, BirdGuard B101 |
| | | Special remarks | |
| | | The assembly requires professional skills or technician | |



More photos






Technical Drawings


Front panel, data in mm

Material thickness: 3,0

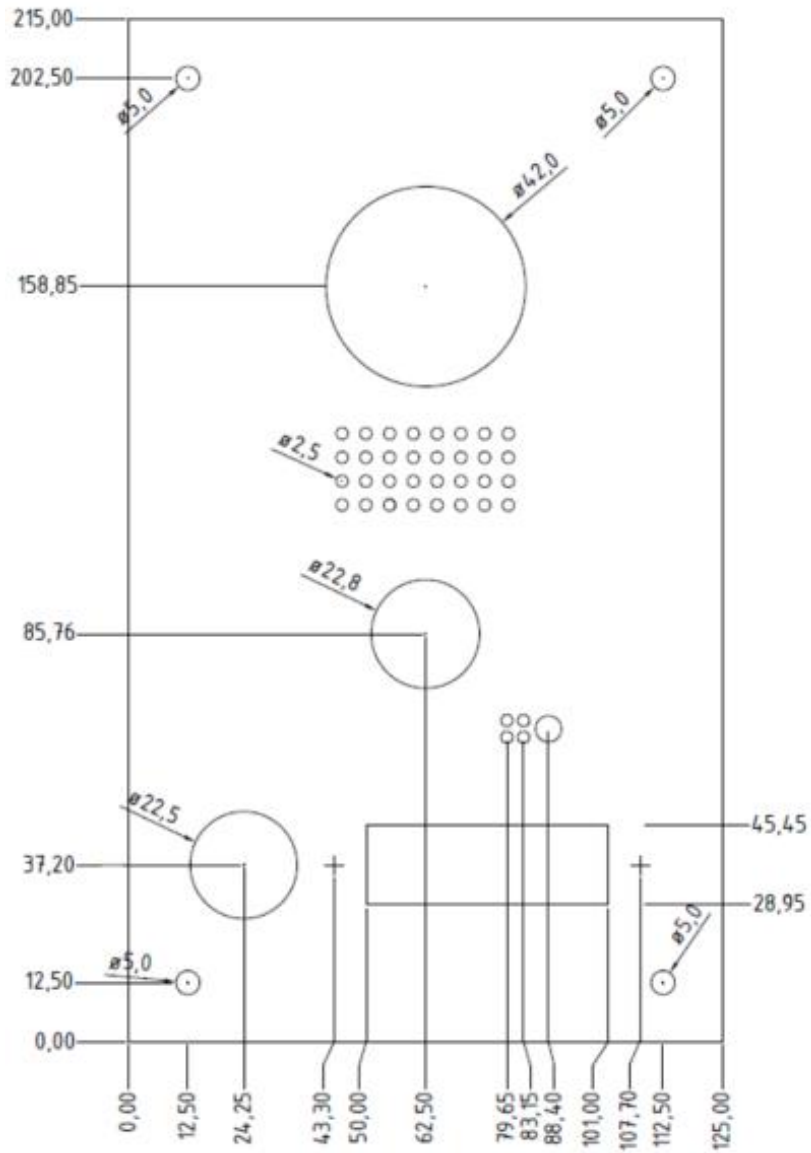



Mounting housing, data in mm

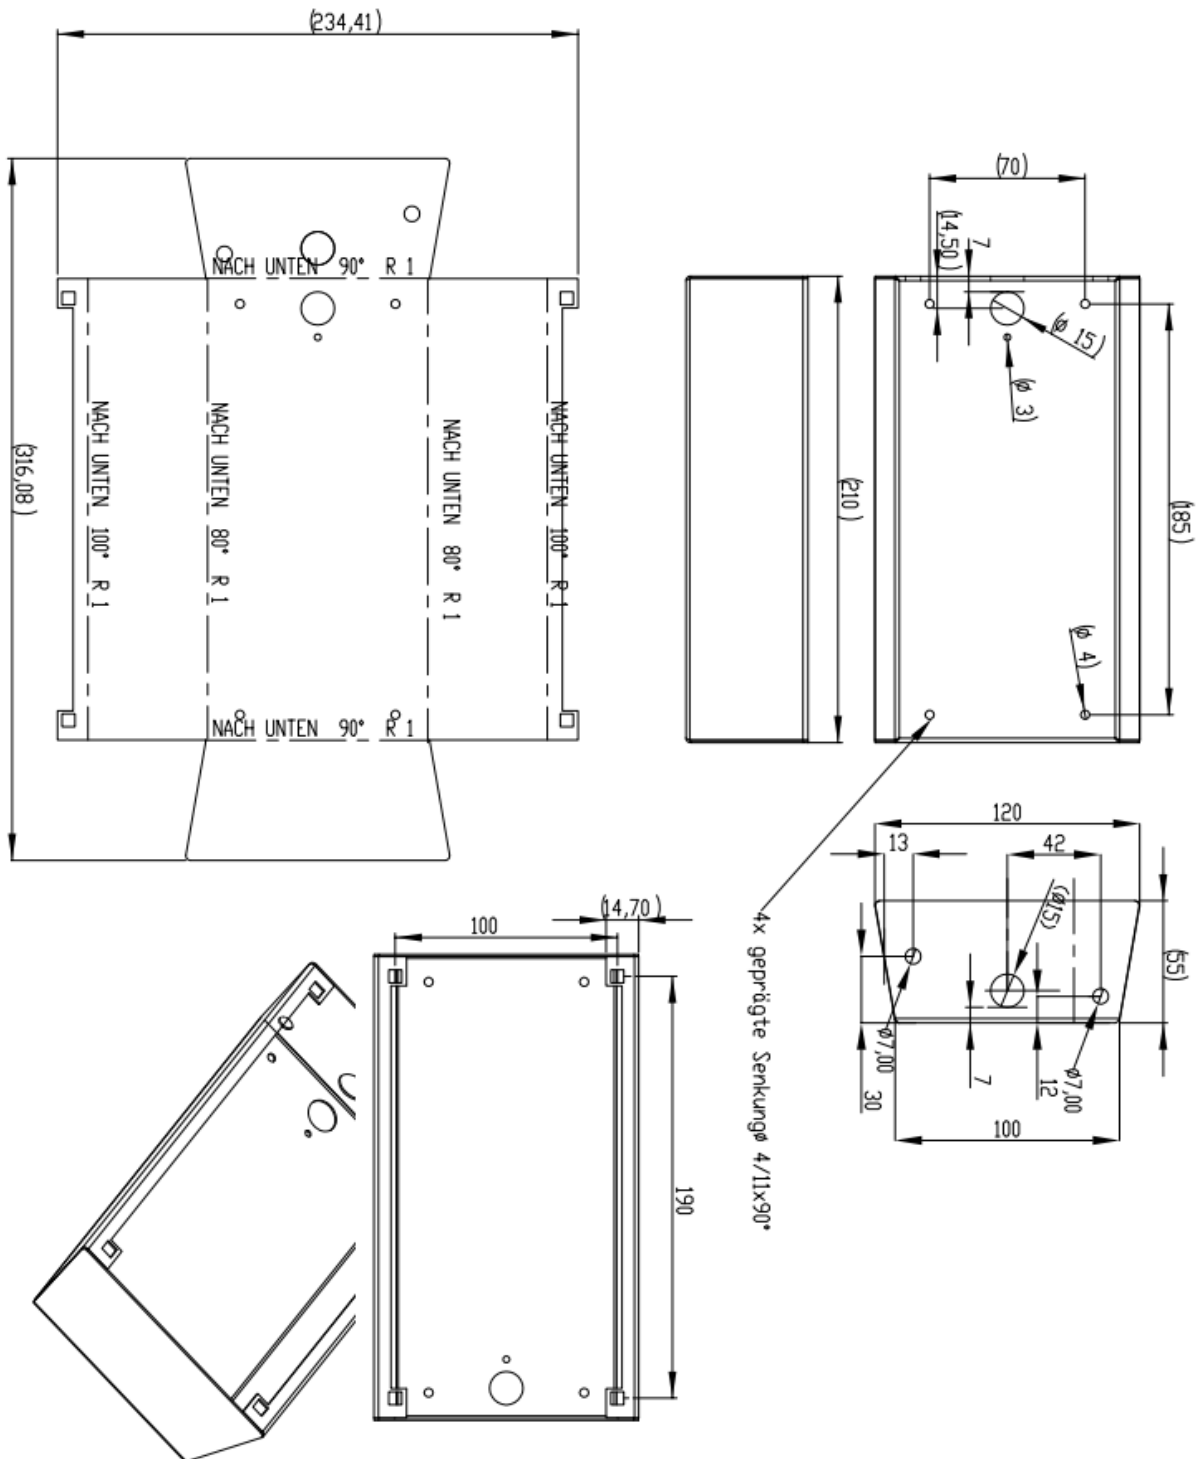

The installation of the Video Door Station to a wall or fence requires professional skills and suitable tools e.g. drilling machine, drill, dowels and if necessary spacers. These are not included.